

P3500I/O HAU

Compact & Lightweight




POWERRUSH
 MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
 POWERRUSH increases electrical current upon demand, above rated output when starting electric motors.

FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Lightweight and compact.
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

POWERRUSH
 MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS.
 Powerrush increases electrical current upon demand, above rated output when starting electric motors.

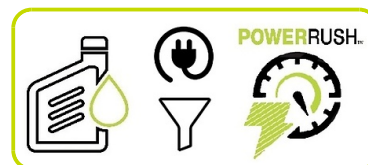

PERFORMANCE

| | | |
|-------------|-------|------|
| Frequency | Hz | 50 |
| Voltage | V | 230 |
| Phase | | 1 |
| Max Power | Watts | 3300 |
| Rated Power | Watts | 3000 |



Engine


| | | |
|-------------------------|-----|----------|
| Engine Brand | | Pramac |
| Type | | OHV |
| Exhaust emission level | | Stage V |
| Operating Speed Nominal | rpm | Variable |
| Fuel | | Petrol |
| Starting Systems | | Recoil |
| Oil capacity | l | 0.6 |
| Low Oil Shutdown | | √ |

Alternator

| | | |
|---------------------------|--|----------|
| Voltage regulation system | | Inverter |
|---------------------------|--|----------|

Dimensional data

| | | |
|----------------------------|--------|-------------|
| Length | (L) mm | 490 |
| Width | (W) mm | 430 |
| Height | (H) mm | 417 |
| Dry weight | kg | 34 |
| Carton box dimension LxWxH | mm | 505x445x455 |

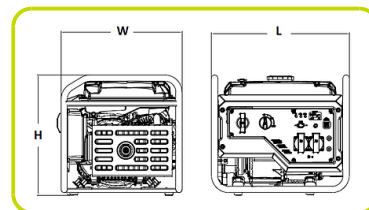

Autonomy

| | | |
|----------------------|-----|-----|
| Fuel tank capacity | | 9 |
| Fuel consumption 75% | l/h | 1.6 |
| Running time 75% | h | 5.5 |



Noise level

| | | |
|------------------------------|-------|----|
| Guaranteed noise level (LWA) | dB(A) | 96 |
| Noise pressure level @ 7 m | dB(A) | 66 |

GENSET CONTROL

COMMANDS

- Selector switch: O/I | Air choke Valve | Starting handle
- Smart throttle: Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.

INSTRUMENTATION:

- Outputting energy (light - Green)
- Overloading and Oil alarming (light - Red)
- Hourmeter / Fuel gauge
- Parallel kit receptacles

PROTECTIONS

- Overload; Oil Guard; Short Circuit; Overvoltage; Overtemperature
- Protection Control panel IP 44

OUTPUT:

- n°2 USB DC 5V 2A

SOCKET TYPE

| | | |
|----------------------|--|---|
| AS/NZS 3112 15A 250V | | 2 |
|----------------------|--|---|



The information is aligned with the Data file at the time of download. Printed on 19/04/2022 (ID 15537)

©2022 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

